

# MAGNEVO® MC SERIES

SUPERIOR DRY-RUN PROTECTION

MAGNETIC-DRIVE CENTRIFUGAL PUMPS



## INDUSTRIES SERVED



COMMERCIAL



WATER TREATMENT



GENERAL INDUSTRIAL



OEM SOLUTIONS



# MAGNEVO® PUMPS

EXPERTS IN MAGNETIC DRIVE PUMPS

# ENGINEERED FOR ZERO LEAKS. BUILT FOR MAXIMUM UPTIME.

## ADVANTAGES OF MAGNETIC-DRIVE TECHNOLOGY



### 1 ELIMINATION OF MECHANICAL SEALS

Mechanical seals are the leading cause of pump failure and fugitive emissions. Magnevo's sealless magnetic-drive design removes this risk entirely.

- ✓ Zero dynamic sealing surfaces
- ✓ Fully enclosed hydraulic system
- ✓ Reduced emission pathways

IMPACT: Compliance assurance and long-term reliability.

### 2 OPERATIONAL SAFETY & ENVIRONMENTAL INTEGRITY

Magnetic-drive containment prevents fluid exposure during operation, protecting people, equipment, and the environment.

- ✓ No leakage under normal conditions
- ✓ Reduced risk of hazardous release
- ✓ Supports EPA/OSHA compliance framework

IMPACT: Improved plant safety and environmental performance.

### 3 MAINTENANCE OPTIMIZATION

Seal systems require frequent replacement and maintenance.

- ✓ Eliminates seal lifecycle costs
- ✓ Reduces maintenance labor by 30-60%
- ✓ Minimizes unscheduled outages

IMPACT: Lower total cost of ownership (TOC).

### 4 DRY-RUN PERFORMANCE

Loss of fluid in conventional pumps often leads to rapid seal failure and thermal damage.

- ✓ No seal faces to overheat
- ✓ Tolerates extended dry-run conditions
- ✓ Maintains pump integrity under adverse events
- ✓ Performance recovers quickly once flow is restored

IMPACT: Increased system resilience and uptime.

## ZERO LEAKS. ZERO EXPOSURE.

Sealless design eliminates the primary source of leaks and emissions.



### ZERO LEAKS

No mechanical seals.  
No leaks. Limited exposure.



### SAFETY YOU CAN TRUST

Fluid containment protects people,  
equipment, and the environment.



### LESS MAINTENANCE

Fewer repairs. Less labor.  
Lower operating costs.




### BUILT FOR RELIABILITY

Engineered to perform.  
Built to last.

# ENGINEERED COMPONENT DESIGN

PRECISION ARCHITECTURE. PROVEN RELIABILITY.

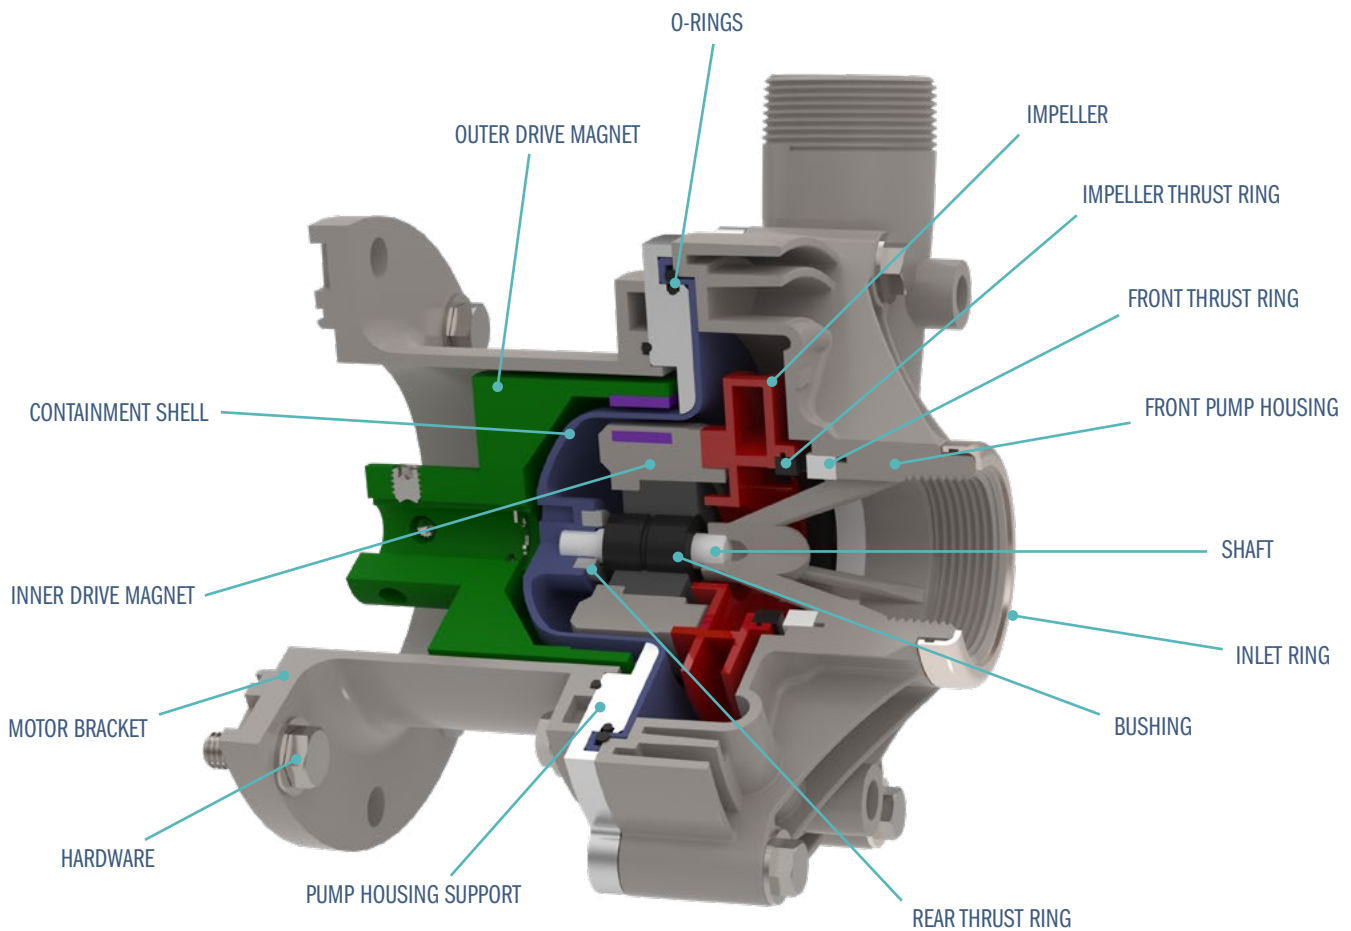


## LIQUID END MATERIALS OF CONSTRUCTION

DESCRIPTION	STANDARD	OPTIONS	DESCRIPTION	STANDARD	OPTIONS
Front Pump Housing	Glass-fiber reinforced polypropylene (GFRPP)	—	Rear Thrust Ring	Silicon carbide / alumina ceramic	—
Front Thrust Ring	Alumina ceramic	—	Outer Drive Magnet	Epoxy-coated steel with nickel-plated neodymium iron boron magnets	—
Impeller Thrust Ring	Glass-filled PTFE with molybdenum	—	Containment Shell	Glass-fiber reinforced polypropylene (GFRPP)	—
O-Rings (fluid elastomers)	FKM (fluorocarbon elastomer)	EPDM	Motor Bracket	Glass-fiber reinforced polypropylene (GFRPP)	—
Impeller	Glass-fiber reinforced polypropylene (GFRPP)	—	Inner Drive Magnet	Neodymium magnets encapsulated in polypropylene	—
Bushing	Carbon graphite	Alumina ceramic	Inlet Ring	316L stainless steel	—
Shaft	Alumina ceramic	—	Hardware	316 stainless steel	—
Pump Housing Support	316L stainless steel	—			

# ADVANCED PROTECTION STARTS INSIDE

SMART DESIGN. ADVANCED MATERIALS. REAL-WORLD PROTECTION.

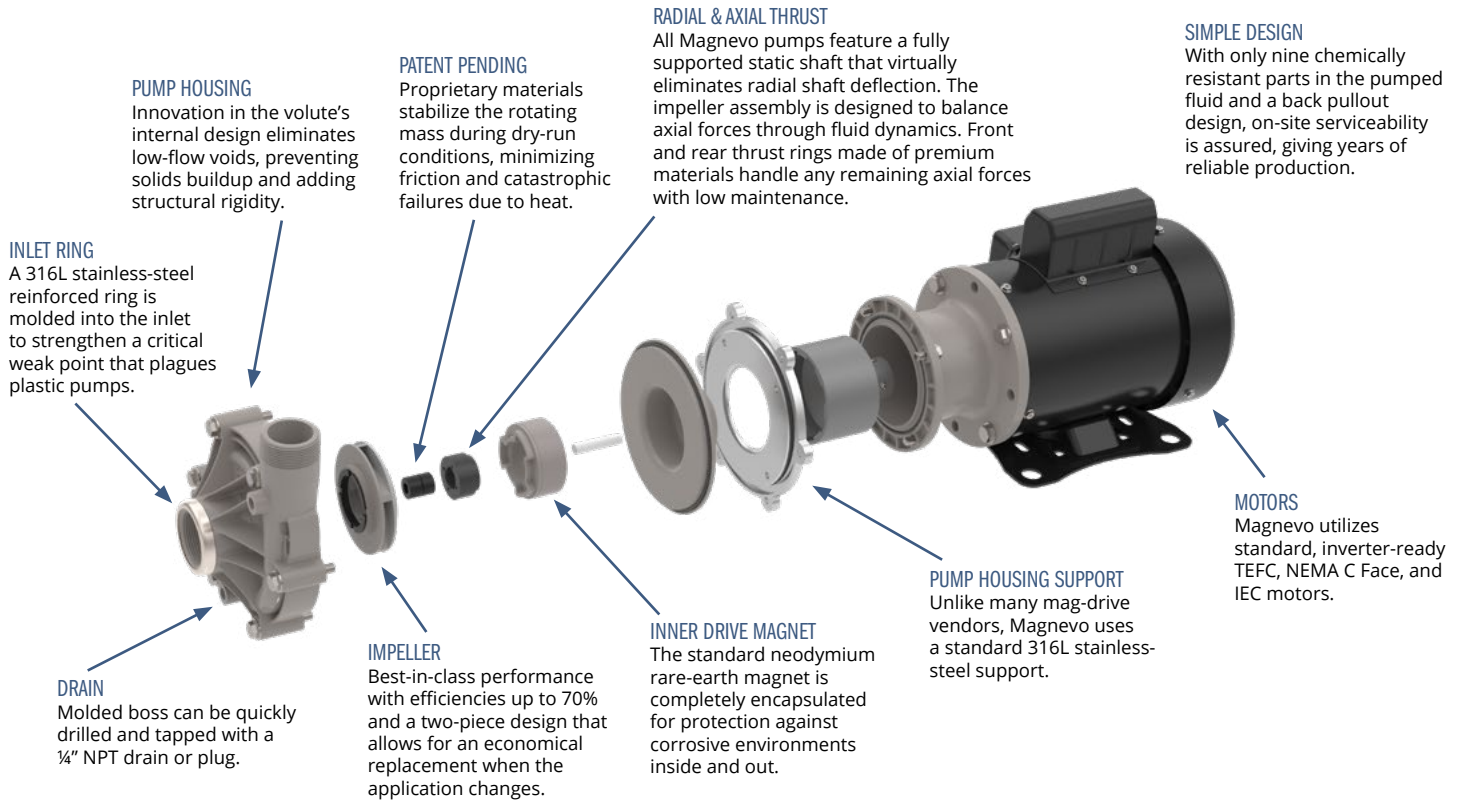

## BUILT TO HANDLE DRY-RUN CONDITIONS

### ADVANCED BEARING & BUSHING MATERIALS



- ✓ The internal sleeve bearings are the first to fail in dry run.
- ✓ Carbon graphite bushings are self-lubricating — even when dry — dramatically extending dry-run survivability.
- ✓ Infused with proprietary materials to reduce heat and increase strength.

### HEAT-RESISTANT THERMOPLASTICS



- ✓ High-grade thermoplastics provide superior heat resistance and mechanical strength.
- ✓ Delivers greater resiliency and long-term reliability compared to pumps built with lower-grade polymers.

### THRUST LOAD MANAGEMENT







- ✓ Dual thrust bearings (front and rear) distribute axial loads.
- ✓ Larger bearing surfaces spread the load and reduce localized heat and scoring.
- ✓ Results in smoother operation and longer component life.

### PATENT-PENDING DRY-RUN DESIGN




- When starved of liquid, the unbuffered run condition within the pump creates internal friction with no cooling capacity.
- ✓ Magnevo's patent-pending stability system reduces non-linear movement in the impeller during dry-run conditions, preventing the impeller from generating catastrophic heat.

# PUMP CURVES

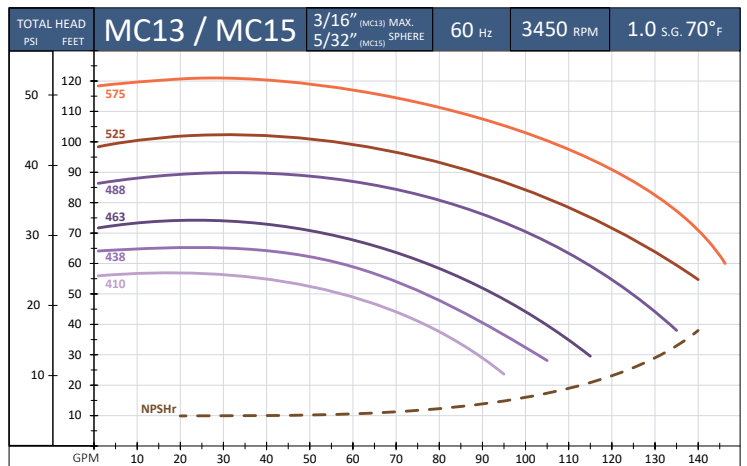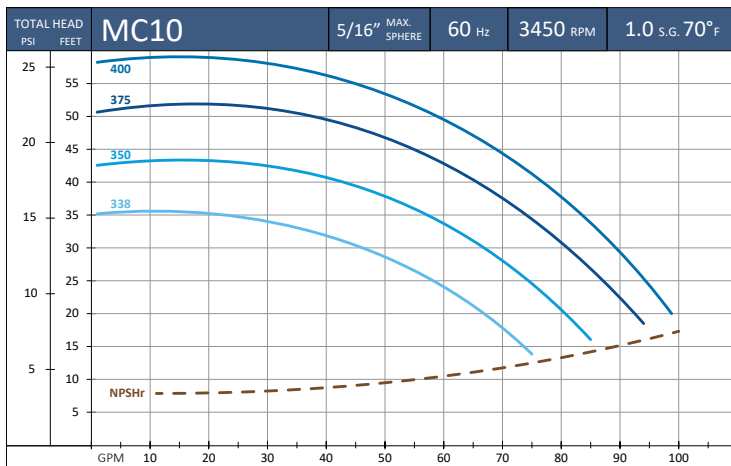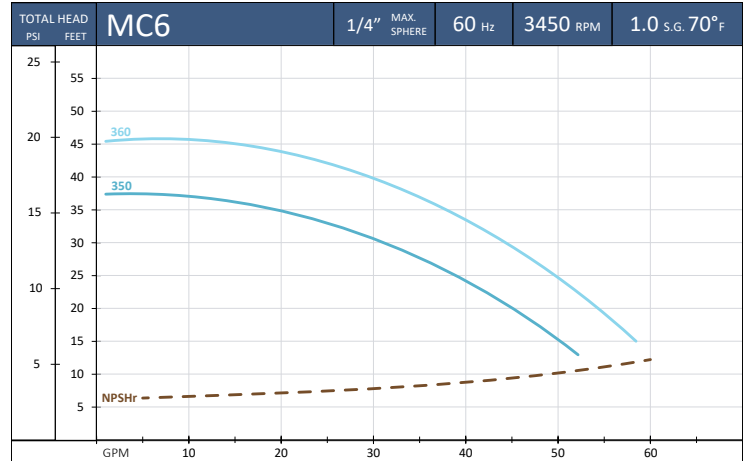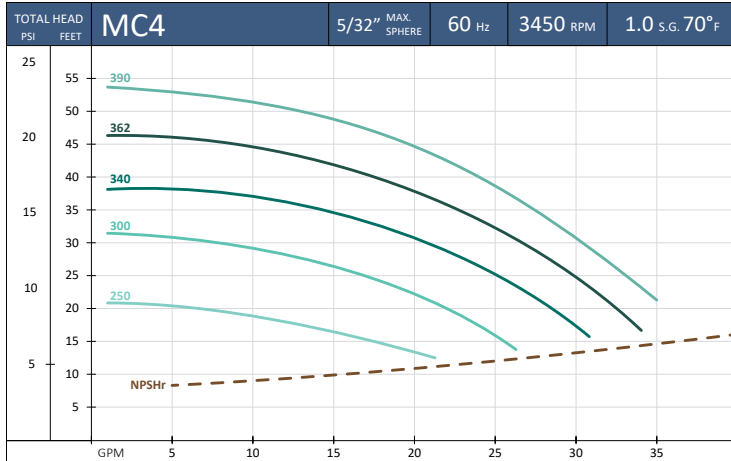

MODEL	INLET (FNPT)	OUTLET (MNPT)	MAX FLOW (GPM)	MAX HEAD (FT)	VOLTAGE	PH	HP	AMPS
MC4-250	1	1	28	21	115/230	1	0.5	6.2/3.1
MC4-300	1	1	30	31	115/230	1	0.5	6.2/3.1
MC4-340	1	1	35	38	115/230	1	0.5	6.2/3.1
MC4-362	1	1	37	46	115/230	1	0.5	6.2/3.1
MC4-390	1	1	40	54	115/230	1	0.5	6.2/3.1
MC6-350	1.5	1	55	37	115/230	1	0.5	6.2/3.1
MC6-360	1.5	1	60	46	115/230	1	0.5	6.2/3.1
MC10-338	1.5	1.5	75	35	115/230	1	0.5	6.2/3.1
MC10-350	1.5	1.5	85	43	115/230	1	1	12.4/6.2
MC10-375	1.5	1.5	90	52	115/230	1	1	12.4/6.2
MC10-400	1.5	1.5	95	59	115/230	1	1	12.4/6.2
MC13-410	2.0	1.5	95	57	115/230	1	1.5	17.4/8.7
MC13-438	2.0	1.5	105	65	115/230	1	1.5	17.4/8.7
MC13-463	2.0	1.5	115	74	115/230	1	2	21.6/10.8
MC13-488	2.0	1.5	135	90	230/460	3	3	7.0/3.5
MC15-525	2.0	2.0	145	103	230/460	3	5	11.0/5.5
MC15-575	2.0	2.0	150	121	230/460	3	5	11.0/5.5


# MODEL NUMBER KEY

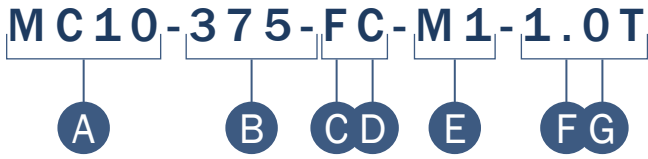

- A. Family series
- B. Impeller curve
- C. Elastomers
- D. Bearing
- E. Motor voltage, phase, Hz
- F. Motor horsepower
- G. Motor enclosure

A	B	C	D	E	F	G
Model	Impeller	Elastomers	Bearings	Voltage	Motor HP (3600 RPM)	Enclosure
MC04 (1" x 1") NPT	250, 340, 362, 390	F-FKM (standard)	C-Carbon graphite (standard)	M1-115/230V 1 Phase - 60 Hz	.33	T- TEFC painted (standard)
MC06 (1.5" x 1") NPT					350, 360	
MC10 (1.5" x 1.5") NPT	338, 350, 375, 400	E-EPDM	S-Sintered SIC		1.0	
					M3-208-230/460V 3 Phase - 60 Hz	
MC13 (2" x 1.5") NPT	410, 438, 463, 488	T-Teflon encapsulated Viton	R-Rulon filled PTFE	MX-Specialty motor (consult factory)		2.0
MC15 (2" x 2") NPT	525, 575				T-Teflon encapsulated Viton	R-Rulon filled PTFE
		5.0				
MC15 (2" x 2") NPT	525, 575	T-Teflon encapsulated Viton	R-Rulon filled PTFE	MX-Specialty motor (consult factory)	7.5	X- Explosion proof
					10	

# DIMENSIONS

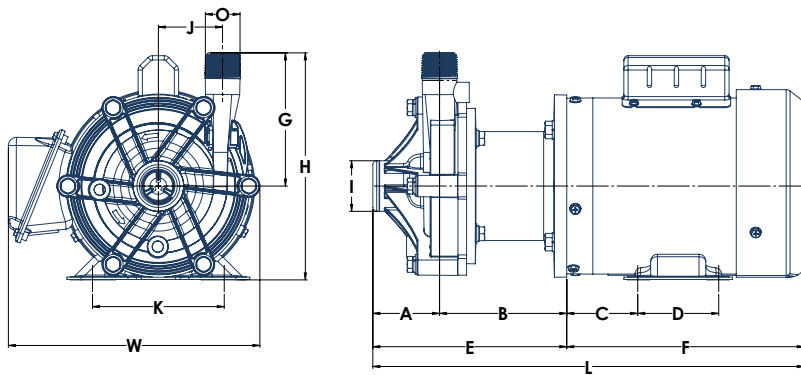

I = Suction  
 O = Discharge  
 L/H/W = Envelope Dimensions

NOTES:  
 1. Dimensions are for reference only.  
 2. Do not use for construction purposes.

DIMENSIONS - INCHES															
Pump Model	Motor Frame	A	B	C	D	E	F	G	H	I (NPT) Suction	J	K	L	O (NPT) Discharge	W
MC4	NEMA 56C	2.47	4.68	2.63	3	7.18	8.8	4.93	8.41	1	2.38	4.88	15.98	1	9.13
MC6	NEMA 56C	2.51	4.68	2.63	3	7.18	8.8	4.93	8.41	1.5	2.54	4.88	15.98	1	9.13
MC10	NEMA 56C	2.35	4.83	2.63	3	7.18	8.8	4.93	8.41	1.5	2.6	4.88	15.98	1.5	9.13
MC13	NEMA 145TC	3.06	5.5	2.85	4	8.61	12	5.75	10.45	2	3.37	5.5	20.61	1.5	10.12
MC15	NEMA 184TC	3.06	5.5	4.39	4.5/5.5	8.61	15.24	5.75	10.45	2	3.37	7.5	23.85	2	11.78

# INDUSTRIES SERVED



CHEMICAL  
PROCESSING




FOOD &  
BEVERAGE



PRIMARY  
METALS



WATER &  
WASTEWATER



SEMICONDUCTOR  
GENERAL INDUSTRIAL



PHARMACEUTICAL  
PULP & PAPER

# APPLICATIONS

## Water & Environmental



- ✓ Water & Wastewater Treatment
- ✓ Reverse Osmosis & Desalination
- ✓ Ultrapure/DI Water Systems
- ✓ Water Reclamation & Conditioning

## Surface Treatment & Finishing



- ✓ Electroplating & Metal Finishing
- ✓ Chroming (Chromic Acid)
- ✓ Etching & Surface Treatment
- ✓ Galvanic Bath Circulation

## Process & OEM Systems



- ✓ Pressure Boosting
- ✓ Plant Services
- ✓ Filtration & Fluid Recirculation
- ✓ Dosing Systems & Test Rigs

## Chemical Processing



- ✓ Chemical Transfer & Distribution
- ✓ Acids, Caustics & Solvents
- ✓ Corrosive & Toxic Liquids
- ✓ Batch Processing & Chemical Dosing

## Industrial & Manufacturing



- ✓ Semiconductor & Electronics Manufacturing
- ✓ Metalworking & Primary Metals
- ✓ Storage Battery Production
- ✓ Printing Circuit Boards

## OEM & EQUIPMENT MANUFACTURERS

Engineered solutions. Built to integrate. Built to perform.

# SPECIALTY USES

- ✓ HVAC & Refrigeration Systems
- ✓ Mining (Chemical Transfer)
- ✓ Aquariums & Environmental Control
- ✓ Solar & Energy Applications
- ✓ Textile, Laundry & Commercial Systems

TYPICAL CHEMICALS			
Water & Wastewater	Sodium hypochlorite, ferric chloride, alum, polymers, lime slurry, wastewater, DI water	Semiconductor/ Electronics	DI water, ultrapure water, mild chemicals
Chemical Processing	Hydrochloric acid, phosphoric acid, sulfuric acid (dilute), caustic soda, detergents	Pulp & Paper	Sodium hydroxide, bleaching agents (mild), process water
Surface Treatment/ Plating	Acid pickling solutions, alkaline cleaners, rinse water, mild plating baths	General Industrial	Glycols, soaps, surfactants, water-based inks, urea
Food & Beverage	Citric acid, acetic acid, sugar solutions, brine, CIP chemicals	Energy Biofuels	Urea, glycols, process chemicals, water
Pharmaceutical	DI water, ultrapure water, mild acids and caustics	HVAC/ Refrigeration	Glycols, cooling water, treatment chemicals
Agriculture	Liquid fertilizers (UAN), herbicides, pesticides, irrigation solutions	Marine/Aquatic	Seawater, aquarium water, treatment chemicals



© 2026 Inovotron. All Rights Reserved.

Magnevo Pumps are designed, assembled and quality-control tested at our headquarters in Minneapolis, Minnesota, USA.



(888) 849-6386  
(952) 679-3939



[www.magnevo.com](http://www.magnevo.com)

U.S. and Foreign Patents Pending  
REV B